

Product: **KLUDI A-QA Thermostatic Dual Shower System DN 15**

Ref.: **6619505-00**

Product description

Thermostatic Dual Shower System DN 15
with horizontally and vertically adjustable riser pipe
wall fastening
temperature control handle with hot water safety device 38°C
with ceramic shut-off valve as rotary valve 90°/90°
outlet hand shower (below) rotate the handle to the rear
outlet head shower (up) rotate the handle forward
protected against back flow
shower holder vertically and horizontally adjustable
with KLUDI SUPARAFLEX shower hose 1/2 x 1/2 inch x 1600 mm
with KLUDI A-QA swivel head shower Ø 250 mm
with KLUDI A-QA s hand shower 3 S, with three spray patterns
with fixing kit, with dirt-catcher sieve

Finishes:
05 chrome

Product picture



Advertisement

thermostatic shower mixer, manufacturer KLUDI GmbH & Co. KG


KLUDI A-QA s item no. 6619505-00

type: Thermostatic Dual Shower System, DN 15 / PN 10, chrome plated brass/plastic, ceramic shut-off valve as a rotary valve 90°/90°, solid handle chrome plated plastic, temperature control handle with hot water safety device 38 °C, with dirt-catcher sieve and backflow preventer, flow rate hand shower booster 11,6 l/min / smooth 11,7 l/min / volume 15,5 l/min at 3 bar, flow rate head shower 16,3 l/min at 3 bar, protected against back flow DIN EN 1717, concealed S unions 1/2 x 3/4 inch, with KLUDI A-QA swivel head shower, chrome plated, with cleaning system, connection 1/2 inch, with KLUDI A-QA s hand shower 3 S with booster / smooth / volume spray, chrome plated plastic, with cleaning system, connection 1/2 inch, with KLUDI SUPARAFLEX shower hose 1/2 x 1/2 inch x 1600 mm, plastic coated with metal effect, outlet to head shower (up) with horizontally and vertically adjustable rigid shower riser, chrome plated, with slider horizontally and vertically adjustable, with wall socket, with fixing kit

dimensions: height: 960-1260 mm, projection: 400 mm, head shower: Ø 250 mm, hand shower: Ø 120/250 mm, width thermostatic mixer: 282 mm

for pressure type water heater, for continuous line heater

Dimensional drawing

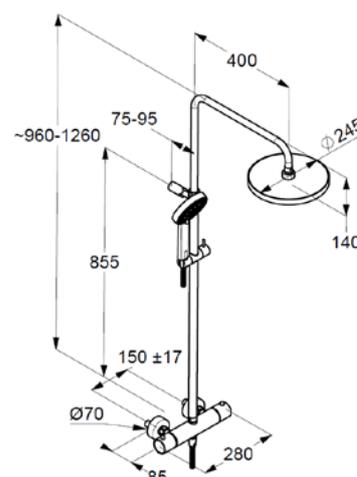

Flow rate diagram

